

Ducati 1098

World Sport Performance Seat Installation Instructions

Part # WS-568

Tool required: 4mm hex wrench

1

Remove Stock Seat:

Access the rear seat bolts by gently lifting and pulling back the left and right rear corners of the seat. Using the hex wrench, remove the two bolts. Lift the seat up and back to remove.



2


Install the World Sport Performance Seat:

Install your new seat by reversing the process outlined in step 1.

3

Hook Upholstery Over Tabs:

Your new World Sport Performance Seat is designed with special tabs to help stabilize the rear foam area. Hook the upholstery over the tabs as shown.

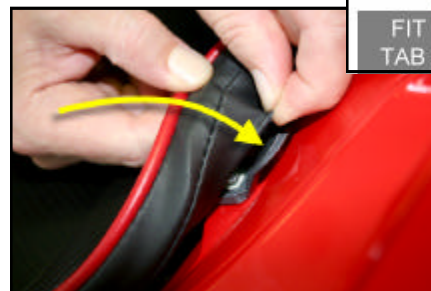

Enjoy your new seat!